

Industrial


 IP65 Ingress Protection

 IK10 Impact Resistance


 Wattage Switchable

 1-10V Dimmable (as Standard)

Dimensions

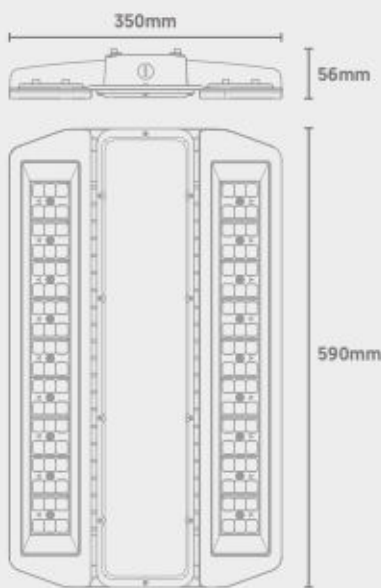

Photometric Data

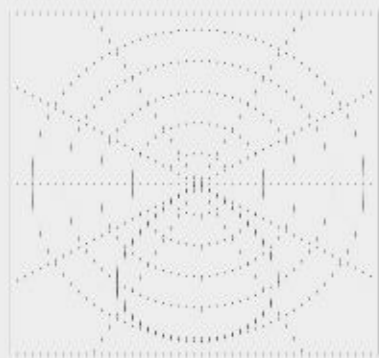

Baylite Pro

Low Bay



7 YEARS WARRANTY
+ 2 YEAR ON SITE*

Wattage switchable from 0 to 200W via dial on back of fitting.

Power (Selectable)	Efficacy	Output	Kelvin
50W	140Lm/cW	7000Lm	4000K
75W	140Lm/cW	10500Lm	
100W	140Lm/cW	14000Lm	
125W	140Lm/cW	17500Lm	
150W	140Lm/cW	21000Lm	
175W	140Lm/cW	24500Lm	
200W	140Lm/cW	28000Lm	

Technical

Input Voltage	AC 100-240V
Colour Rendering Index	>80
Beam Angle	90°
Power Factor	0.97
Operating Temp.	-20 to +45°C
Materials	Aluminium & Tempered Glass
IP Rating	IP65
IK Rating	IK10
Dimmable	1-10V [as Standard]
Dimensions	590mm x 350mm x 56mm
Weight	7.5kg
MacAdam Step	<3
Lifetime	50,000 hours, L90-B10 [Ta 25 °C]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS