

## External



IP66 Ingress Protection



Aluminium Housing




High LED Efficacy



Asymmetric Beam

### Dimensions

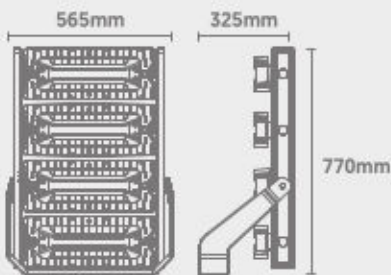

# QSport Gen 2

## High-Power Flood Light



| Power | Efficacy | Output   | Kelvin |
|-------|----------|----------|--------|
| 1260W | 135lm/cW | 170100Lm | 5700K  |

### Technical

|                        |  |
|------------------------|--|
| Input Voltage          | AC 100-277V  |
| Colour Rendering Index | >70  |
| Beam Spread            | 140°/50°   |
| Power Factor           | 0.95   |
| Operating Temp.        | -20 to +40°C   |
| Materials              | Die-Cast & Polycarbonate   |
| IP Rating              | IP66   |
| Dimensions             | 565mm x 770mm x 325mm  |
| Weight                 | 25kg   |
| MacAdam Step           | <3   |
| Lifetime               | 50,000 hours, L70-B10 (Ta 25 °C)   |
| CE Standards           | EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives          | LVD, EMC, ERP & RoHS   |



Light Source Energy Rating

### Photometric Data

