


Linear

Olton UGR Academic Batten 5ft Dual Wattage 24W & 43W 4000K White - H3S MW



Robust steel body, Ribbed Polycarbonate diffuser to reduce glare, Multi 20mm conduit entry, Switchable wattage available on internal driver High output self-test Emergency available

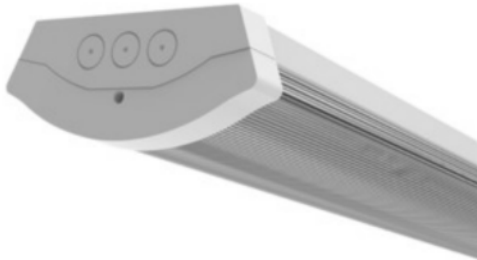

General Data

Technology	LED
Mounting options	Ceiling Wall Suspended
Install Options	BESA
Electrical Connector Type	Push fit terminal
Input Cable	No
Input Electrical Connection	Live Neutral Earth P Live
General Application	Residential Commercial
Operating Temperature Range °C	0 - +30
Warranty (Years)	5

Optical Data

LED Manufacturer / Type	SMD 2835
Fixture Luminous Flux (Lm)	3350 6025
Luminaire Efficacy @4000K (lm/W)	140
LOR %	100
Colour Selectable	No
Beam Angle°	75
Glare Control (UGR)	<19
Photobiological Risk Group	RG0

Light Source Data

Energy Class	B
SDCM	5
Colour Temperature (K)	4000
Light Colour	Cool White
CRI Ra	80

Electrical Data

Wattage (W)	24 43
Total power consumption (W)	23.6 41.2
Mains voltage (V)	220 - 240
Lamp power factor	>0.95
Electrical protection	Class I
Driver Output (V)	39-42
Driver Output Current (mA)	515 920
Control Gear Type CC or CV	Constant Current
Dimmable	No
Driver Brand	Luminaireux
Nominal Frequency (Hz)	50 60

Lifetime Data

Lifespan L70 B50 @25°C (Hrs)	50000
-------------------------------------	-------

Emergency Data

Battery Type	LiFeP04
Battery Capacity (mAh)	1500mAh
Battery Warranty (Years)	2
Recharge Time (Hours)	24 Hours
Emergency Type	Non-Maintained
Test Procedure	Self-Test
Emergency Duration (Hours)	3
Emergency Output	160

Sensor Data

Sensor Technology	Microwave
Sensor Type	ON/OFF
Max. Mounting Height (m)	6
Hold time	5s 30s 90s 3min 20min 30min
Detection area (m)	12
Daylight Threshold	2Lux 10Lux 25Lux 50Lux Disable
Detection radius (°)	150 (Wall mounted) 360 (Ceiling Mounted)

Physical Data

Housing Colour	White RAL 9016
Body Material	Steel
Driver Housing	Polycarbonate
IP Rating	20
IK Rating	4
Diffuser Material	Polycarbonate
Diffuser Finish	Milky
Nominal Product Length (mm)	1490
Nominal Product Width (mm)	203
Nominal Product Height (mm)	83
Weight (kg)	2.96

Standards and Approvals

Manufactured In Accordance To	EN 60598-1 EN60598-2-22
CE Mark	Yes
UKCA Mark	Yes
WEEE Symbol	Yes
Certificate of Conformity	Available on Request
Accredited Members	LIA, ISO9001

