

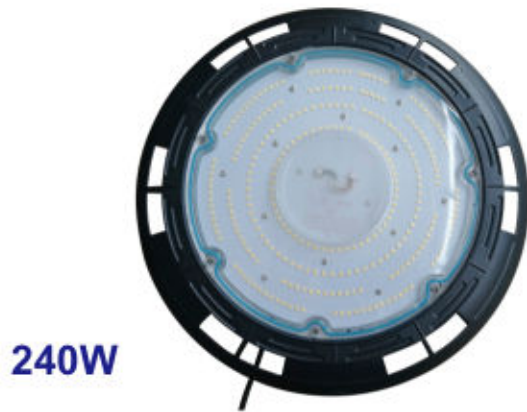




Photo

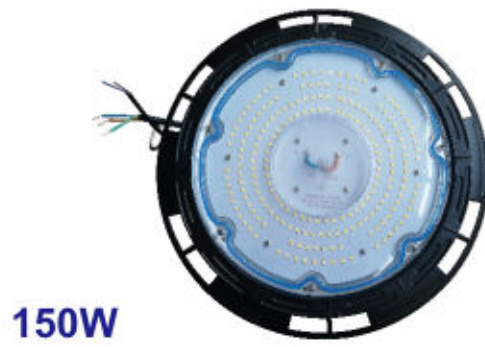



The back of the lamp

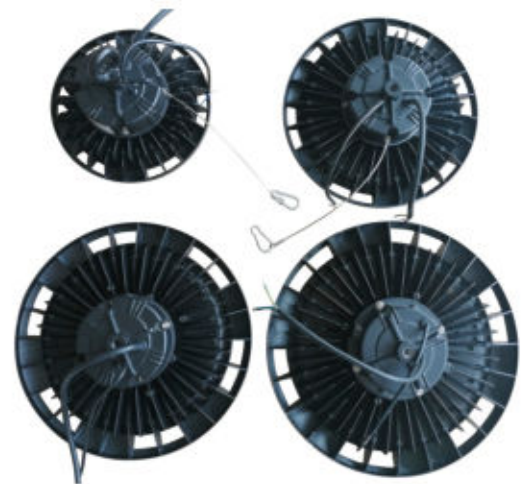



## Dimensions(Unit:mm)

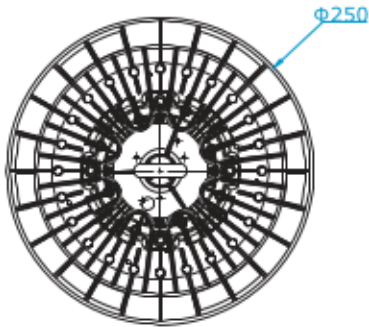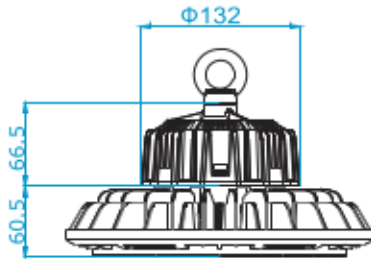



100W

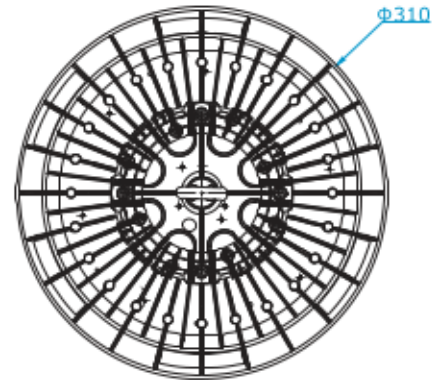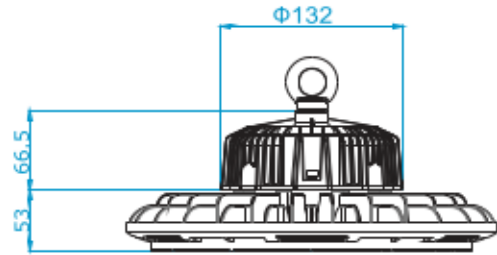

150W

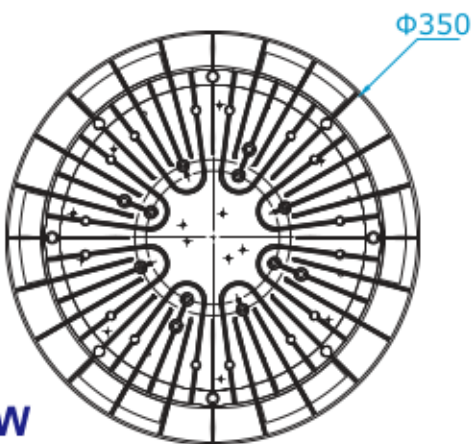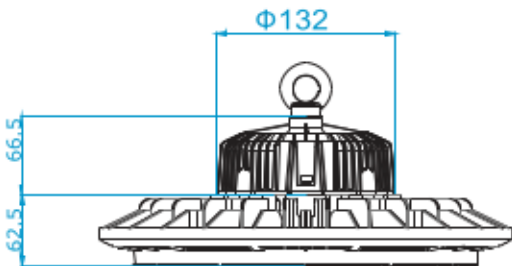


200W

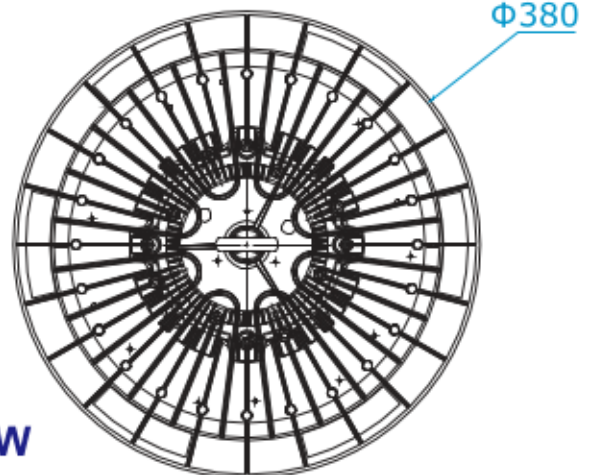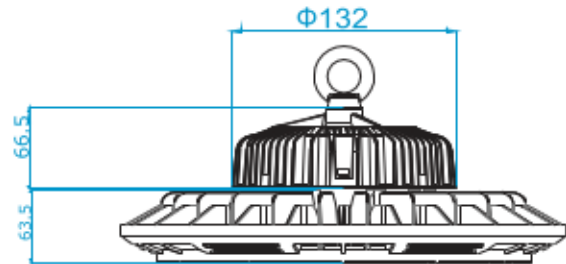

240W



## Exploded view

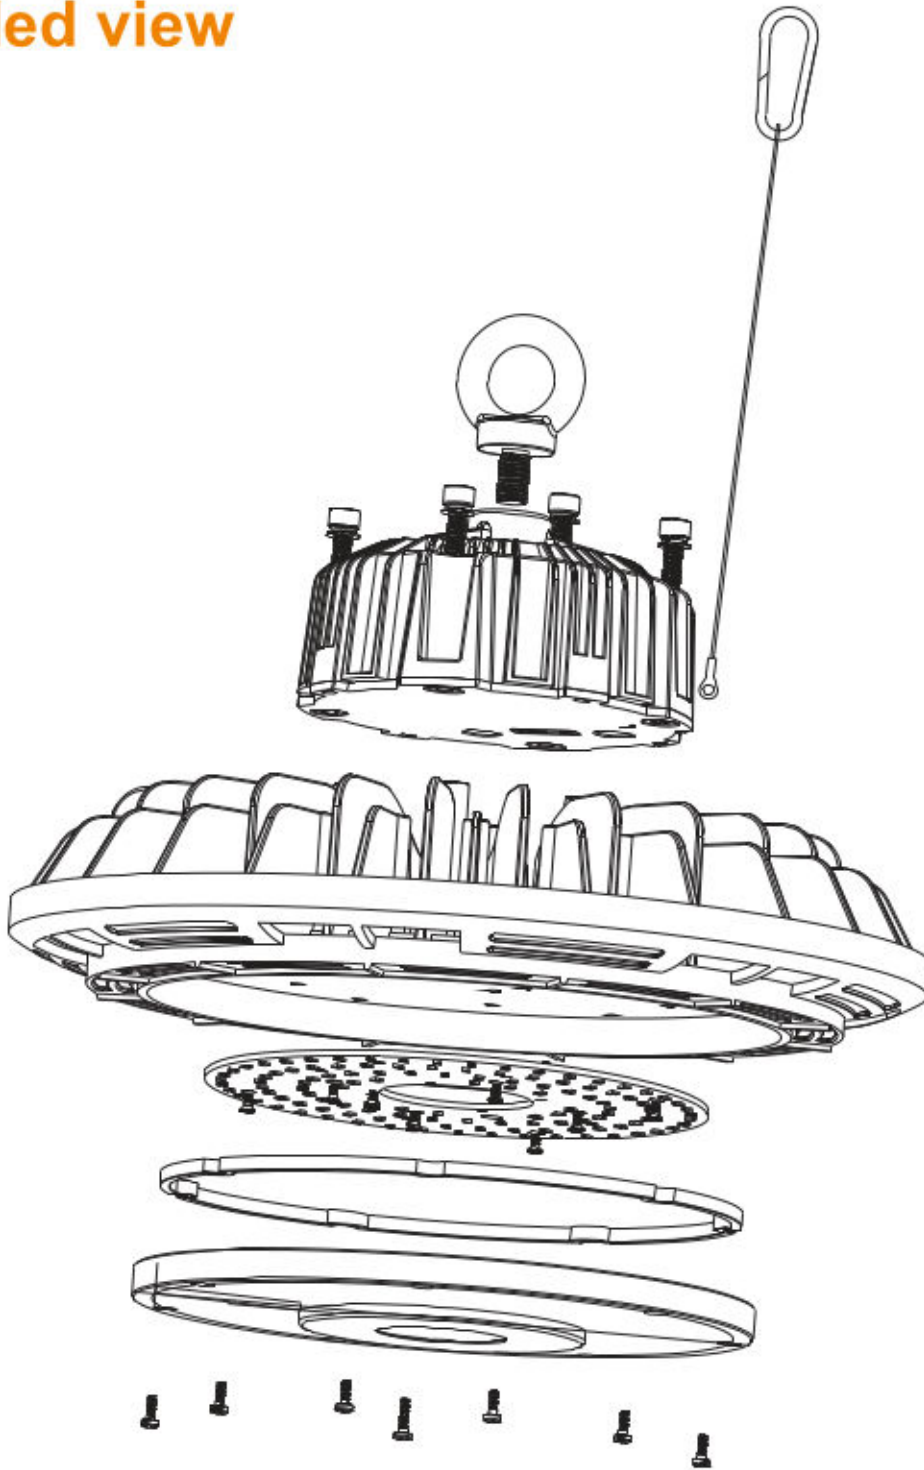

## Electrical/Optical Characteristics/Specifications

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.5A	DC120V	0.78A	100W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
SMD3030	140PCS	≥80Ra	Luminous flux	14000LM	15000LM	15000LM
			Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	Φ250*122mm	2.5Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L330*W330*H170mm	3.4Kg	
Outer carton package	4*1layer=4PCS/carton,K=K corrugated paper, L680*W345*H380mm,GW:15.6KG					
Optional dimming type	1-10V dimming					


Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.75A	DC114V	1.2A	150W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
SMD3030	209PCS	≥80Ra	Luminous flux	21000LM	22500LM	22500LM
			Beam Angle	120° or 90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	Φ310*113mm	3.2Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L390*W390*H170mm	4.2Kg	
Outer carton package	3*1layer=3PCS/carton,K=K corrugated paper, L410*W410*H555mm,GW:14.6KG					
Optional dimming type	1-10V dimming					

## Electrical/Optical Characteristics/Specifications


Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.0A	DC120V	1.55A	200W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
SMD3030	280PCS	≥80Ra	Luminous flux	28000LM	30000LM	30000LM
			Beam Angle	120° or 90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	Φ350*120mm	3.7Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L430*W430*H170mm	4.7Kg	
Outer carton package	3*1layer=3PCS/carton,K=K corrugated paper, L450*W450*H555mm,GW:16.1KG					
Optional dimming type	1-10V dimming					

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.2A	DC216V	1.04A	240W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
SMD3030	360PCS	≥80Ra	Luminous flux	33600LM	36000LM	36000LM
			Beam Angle	120° or 90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	Φ380*115mm	4.5Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L460*W460*H190mm	5.5Kg	
Outer carton package	2*1layer=2PCS/carton,K=K corrugated paper, L480*W480*H420mm,GW:13KG					
Optional dimming type	1-10V dimming					

## Test report

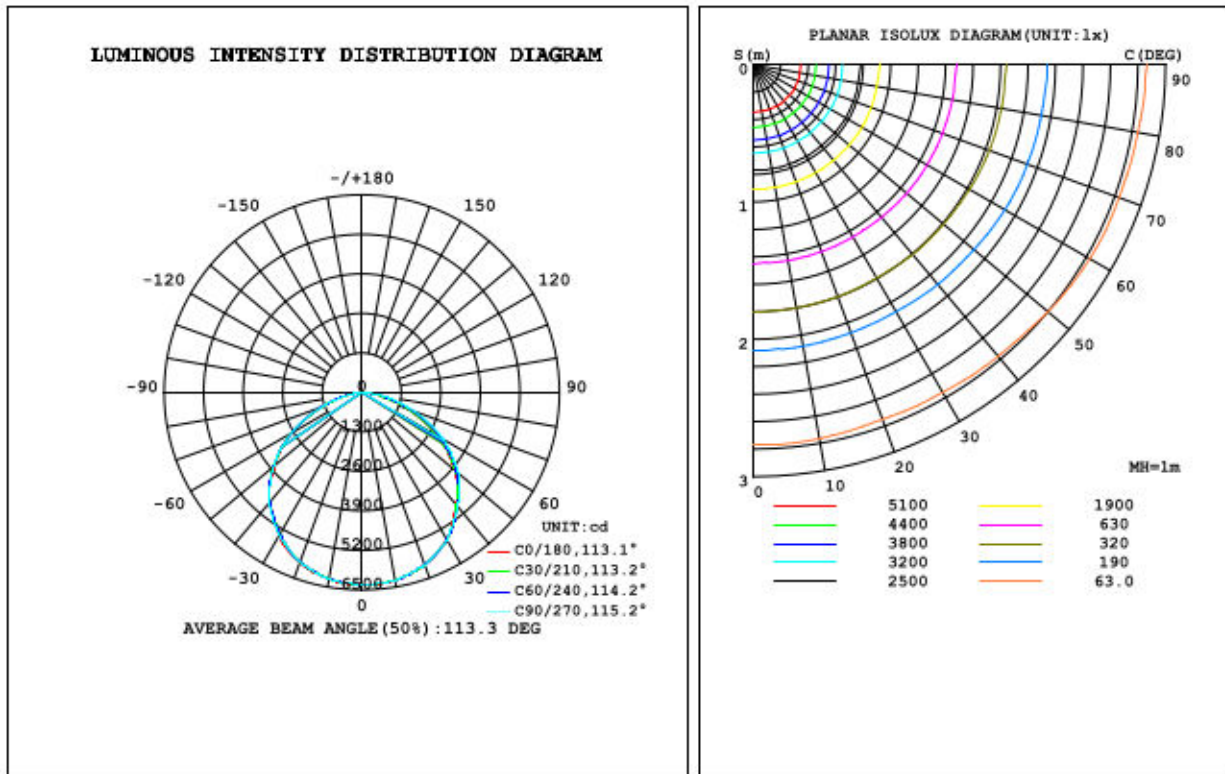

## Packing Info

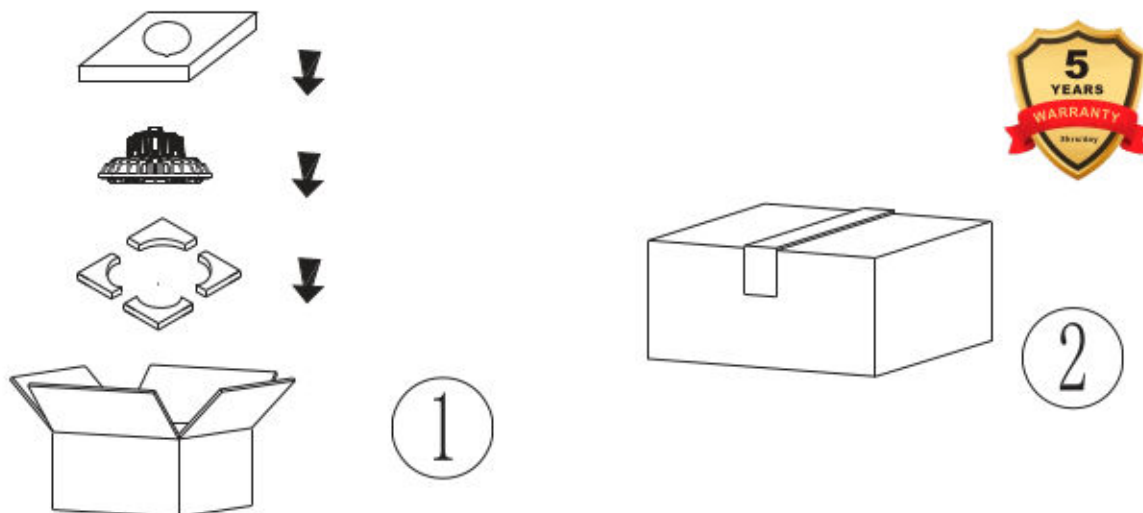

### Cautions:

1. This product must be installed by professionals;
2. If there is any damage on the power line or shell, it should be taken as defective product and should not be used;
3. High voltage, non-professionals are not allowed to install, disassemble the product or connect wires.