

Style Product Datasheet

Track mounted spotlight

Product Data

Warranty	5 years
Applications	Interior
Certification(s)	UKCA, CE, RoHS

Physical Data

Colour Finish	White
Luminaire Fixing	Track mounted
Construction Material	Aluminium
Diffuser Type	PMMA as standard Honeycomb louvre - TP(a) as optional

Electrical Data

Voltage Range	AC100-240V
Power Factor	>0.90
Inrush Current	<60A
Protection Class IEC	Class I

Performance Data


Kelvin	4000K
Efficacy	~85 Lm/W
Operating Temperature	-20°C to +45°C
Beam Angle	24°
Operating Hours	>50000
CRI	>90 Ra
IP Rating	IP20
IK Rating	IK08
Macadam Ellipse	≤3 sdcM
L70 B50	100,000 hours
L80 B50	90,000 hours
L90 B50	42,000 hours
LEDs	Single bin Bridgelux COB

Versatility of rotation and angle adjustments



Size	Wattage	Lumens	Running Current	Unit Weight (kg)
ø82 x 217	24W	2042	DC550mA	1.40
ø120 x 265	40W	3400	DC1200mA	1.83

Dimensions (mm)

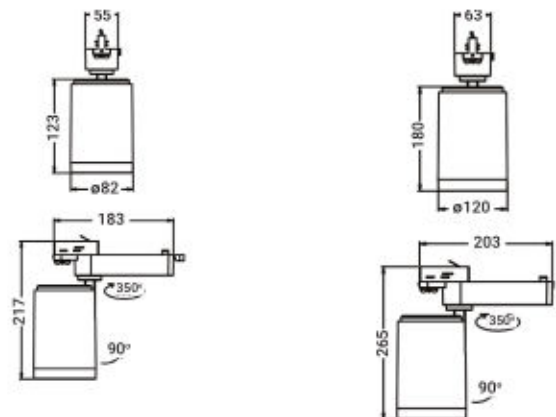

Style Family

- Option**
- _____ DALI dimming
 - _____ 0-10V dimming
- } 1st Add dimming suffix
-
- _____ Honeycomb louvre 65mm (24W)
 - _____ Honeycomb louvre 105mm (40W)
- } 2nd Add honeycomb louvre diffuser suffix



Light Distribution:

