



# SpecLine


For Suspension &  
Surface Mounting

1200mm

Rear LED Clip-in For  
Additional Uplight

### Technical

|                    |                           |
|--------------------|---------------------------|
| • InputVoltage     | AC 220-240V               |
| • IP Rating        | IP20                      |
| • Mains Frequency  | 50/60 Hz                  |
| • Diffuser Type    | Microprismatic            |
| • CRI              | >80                       |
| • Operating Temp.  | -25°C to +40°C            |
| • Materials        | Aluminium                 |
| • Dimmable         | Dali Dimmable As Standard |
| • Emergency Output | 300Lm                     |

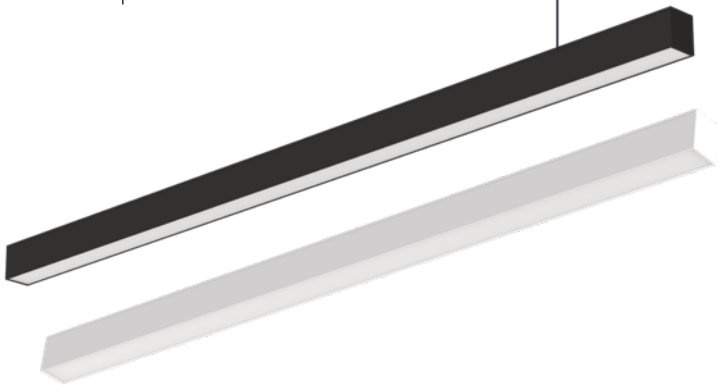

Microprismatic Diffuser  
(Low Glare)



Wattage  
Switchable



DALI Dimmable  
(As Standard)



Tri-Colour  
(3000K/4000K/5000K)

| Specline - Black Housing |              |       |           |        |                                        |
|--------------------------|--------------|-------|-----------|--------|----------------------------------------|
| Part Code                | Size         | Power | Efficac y | Output | Kelvin                                 |
| LP-SPECL-WS-1200TC       | 1200x60x75mm | 24W   | 120Lm/cW  | 2880Lm | Tri-Colour:<br>3000K, 4000K &<br>5000K |
|                          |              | 32W   | 120Lm/cW  | 3840Lm |                                        |
|                          |              | 40W   | 120Lm/cW  | 4800Lm |                                        |

Net Weight| 14.0 4kg

| Specline - White Housing |              |       |           |        |                                        |
|--------------------------|--------------|-------|-----------|--------|----------------------------------------|
| Part Code                | Size         | Power | Efficac y | Output | Kelvin                                 |
| LP-SPECL-WS-1200TC/WH    | 1200x60x75mm | 24W   | 120Lm/cW  | 2880Lm | Tri-Colour:<br>3000K, 4000K &<br>5000K |
|                          |              | 32W   | 120Lm/cW  | 3840Lm |                                        |
|                          |              | 40W   | 120Lm/cW  | 4800Lm |                                        |

Net Weight| 14.0 4kg


>80% down & 20% option - when using uplight accessory.

| Option           | Option Code |
|------------------|-------------|
| 3 Hour Emergency | +7/EM       |



SILVAIR CASAMBI

### Dimensions

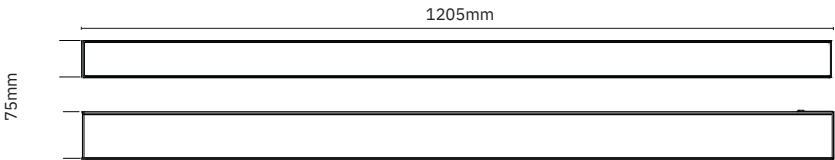

### Indirect Accessories

#### PartCode:

LP-SPECLINE-1200/UPLIGHT/WH  
(White Housing)



#### Part Code:

LP-SPECLINE-1200/UPLIGHT  
(Black Housing)



### Photometric Data

