

For Suspension &
Surface Mounting

1800mm

Rear LED Clip-in For
Additional Uplight

SpecLine

Technical

• Input Voltage	AC 220-240V
• IP Rating	IP20
• Mains Frequency	50/60 Hz
• Diffuser Type	Microprismatic
• CRI	>80
• Operating Temp.	-25°C to +40°C
• Materials	Aluminium
• Dimmable	Dali Dimmable As Standard
• Emergency Output	300Lm



SpecLine Features


Microprismatic Diffuser
(Low Glare)

Wattage
Switchable

DALI Dimmable
(As Standard)

Tri-Colour
(3000K/4000K/5000K)

SpecLine - Black Housing

Part Code	Size	Power	Efficacy	Output	Kelvin
LP-SPECL-WS-1800TC	1805x60x75mm	36W	120Lm/cW	4320Lm	Tri-Colour: 3000K, 4000K & 5000K
		48W	120Lm/cW	5760Lm	
		60W	120Lm/cW	7200Lm	

Net Weight| 27.92kg

SpecLine - White Housing


Part Code	Size	Power	Efficacy	Output	Kelvin
LP-SPECL-WS-1800TC/WH	1805x60x75mm	36W	120Lm/cW	4320Lm	Tri-Colour: 3000K, 4000K & 5000K
		48W	120Lm/cW	5760Lm	
		60W	120Lm/cW	7200Lm	

Net Weight| 27.92kg


Option	Option Code
3 Hour Emergency	+7/EM


SILVAIR CASAMBI

Dimensions

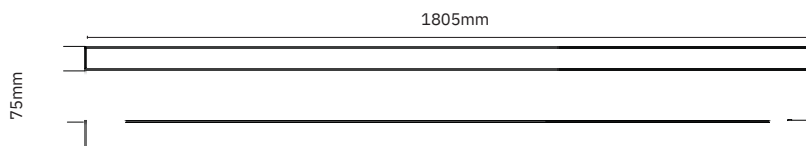

Photometric Data



Indirect Accessories

Part Code:

 LP-SPECLINE-1800/UPLIGHT/WH
(White Housing)


Part Code:

 LP-SPECLINE-1800/UPLIGHT
(Black Housing)
