



For Suspension &
Surface Mounting

2400mm


3000mm

Rear LED Clip-in For
Additional Uplight

SpecLine

Technical

• Input Voltage	AC 220-240V
• IP Rating	IP20
• Mains Frequency	50/60 Hz
• Diffuser Type	Microprismatic
• CRI	>80
• Operating Temp.	-25°C to +40°C
• Materials	Aluminium
• Dimmable	Dali Dimmable As Standard
• Emergency Output	300Lm

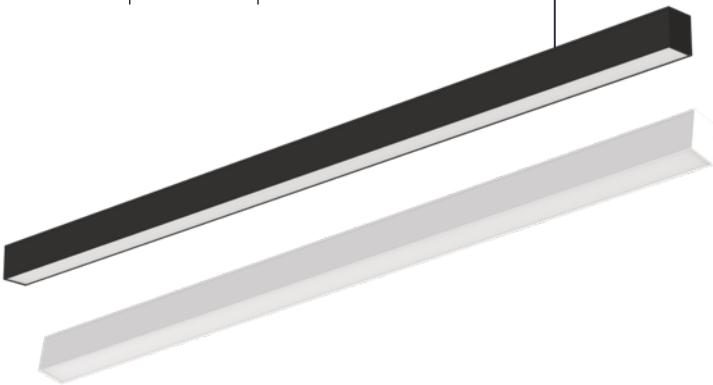

SpecLine Features



Microprismatic Diffuser
(Low Glare)



Wattage
Switchable



DALI Dimmable
(As Standard)



Tri-Colour
(3000K/4000K/5000K)

SpecLine - Black Housing

Part Code	Size	Power	Efficacy	Output	Kelvin
LP-SPECL-WS-2400TC	2405x60x75mm	48W	120Lm/cW	5760Lm	Tri-Colour: 3000K, 4000K & 5000K
		64W	120Lm/cW	7680Lm	
		80W	120Lm/cW	9600Lm	

Net Weight| 20kg

SpecLine - White Housing

Part Code	Size	Power	Efficacy	Output	Kelvin
LP-SPECL-WS-2400TC/WH	2405x60x75mm	48W	120Lm/cW	5760Lm	Tri-Colour: 3000K, 4000K & 5000K
		64W	120Lm/cW	7680Lm	
		80W	120Lm/cW	9600Lm	

Net Weight| 20kg

SpecLine - Black Housing

Part Code	Size	Power	Efficacy	Output	Kelvin
LP-SPECL-WS-3000TC	3005X60X75mm	60W	120Lm/cW	7200Lm	Tri-Colour: 3000K, 4000K & 5000K
		80W	120Lm/cW	9600Lm	
		100W	120Lm/cW	12000Lm	

Net Weight| 20kg

Option	Option Code
3 Hour Emergency	+7EM



SILVAIR CASAMBI

Indirect Accessories

Part Code:

LP-SPECLINE-2400/UPLIGHT/WH

(White Housing)

Part Code:

LP-SPECLINE-2400/UPLIGHT

Part Code:

LP-SPECLINE-3000/UPLIGHT/WH

(White Housing)

Part Code:

LP-SPECLINE-3000/UPLIGHT

75mm

Photometric Data


(Black Housing)



(Black Housing)

75mm

Dimensions

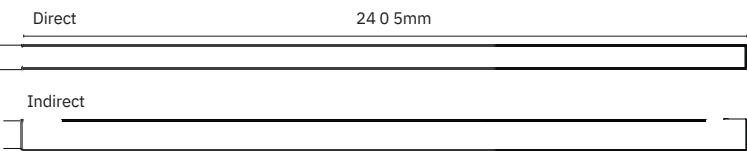

Dimensions

