


Continuous Linear


-  Direct/Indirect Output
-  Wattage Switchable
-  1-10V Dimmable (as Standard)
-  Tri-Colour (3000K/4000K/5000K)

Dimensions

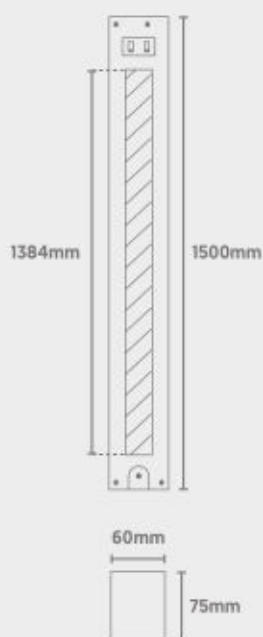

A T G E Light Source Energy Rating

Photometric Data

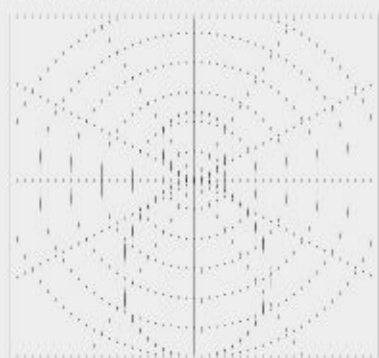

SpecLine

Direct/Indirect Linear



Power (Selectable)	Efficacy	Output Split ↓ ↑	Kelvin
30W	120Lm/cW	1080Lm ↑ 2520Lm ↓	Tri-Colour: 3000K, 4000K or 5000K
40W	120Lm/cW	1440Lm ↑ 3360Lm ↓	
50W	120Lm/cW	1800Lm ↑ 4200Lm ↓	

Technical

Input Voltage	AC 200-240V
Colour Rendering Index	>80
Beam Spread	110°
Diffuser Type	Microprismatic
Operating Temp.	-20 to +45°C
Materials	Aluminium & Polycarbonate
IP Rating	IP20
Dimmable	1-10V (as Standard)
Dimensions	1500mm x 75mm x 60mm
Weight	3.1kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS